


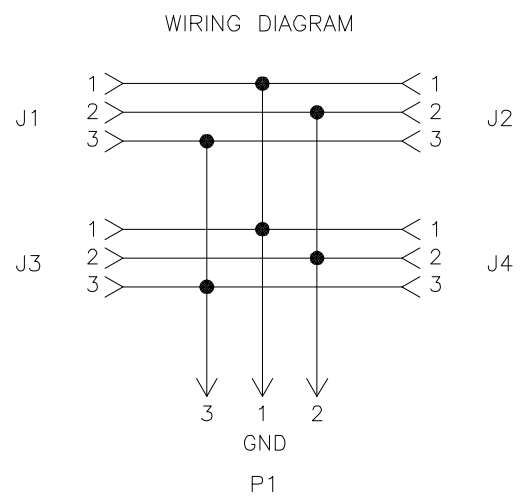
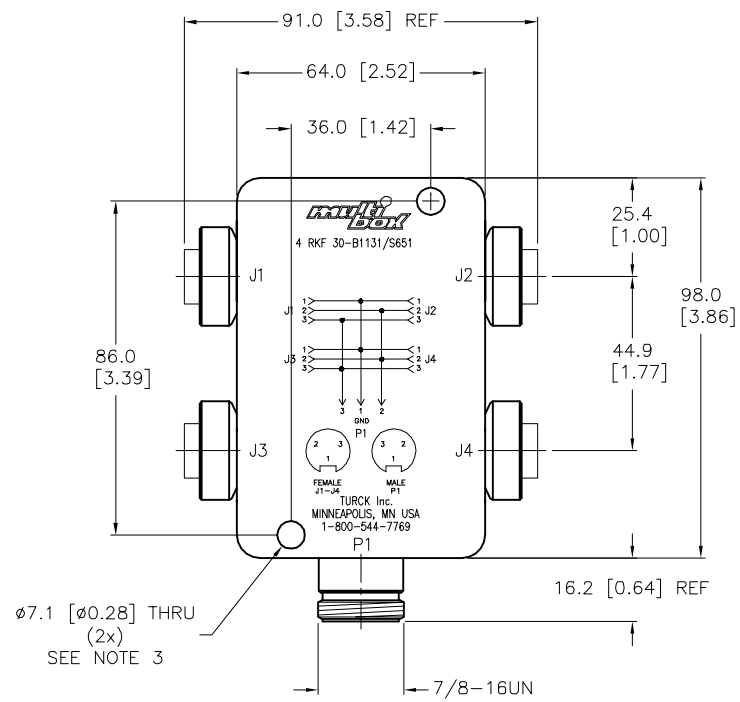


FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		MATERIAL	
		HOUSING MATERIAL	ALUMINUM ALLOY
		HOUSING FINISH/COLOR	EPOXY/BLACK
		CONTACT CARRIER MATERIAL	TPU
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
		ELECTRICAL DATA	
		OPERATING VOLTAGE	300 VDC
		OPERATING CURRENT	9.0 A
		MECHANICAL DATA	
		PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN RKM 66 CORDSET AND ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
		OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)



- NOTES:
1. "/S651" DESIGNATES PARALLEL WIRING.
 2. BOX HEIGHT IS 1.36 [36.0 mm] NOMINAL.
 3. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT SUPPLIED).
 4. MATING CORDSET FOR B1131 CONNECTOR – RKM 36-* M.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT TV		DATE 01/05/16	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD K.Y.		SCALE 1=2.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION 4 RKF 30-B1131/S651	
						DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U2-26403	
								REV A	
A DRAWING RELEASE				TV 01/18/16				FILE: U2-26403	
REV DESCRIPTION				BY DATE ECO NO.				SHEET 1 OF 1	