


YEL,PVC,6X22,ITC,MSHA

Instrumentation Tray Cable – Reelfast™ Bulk Cable



Features

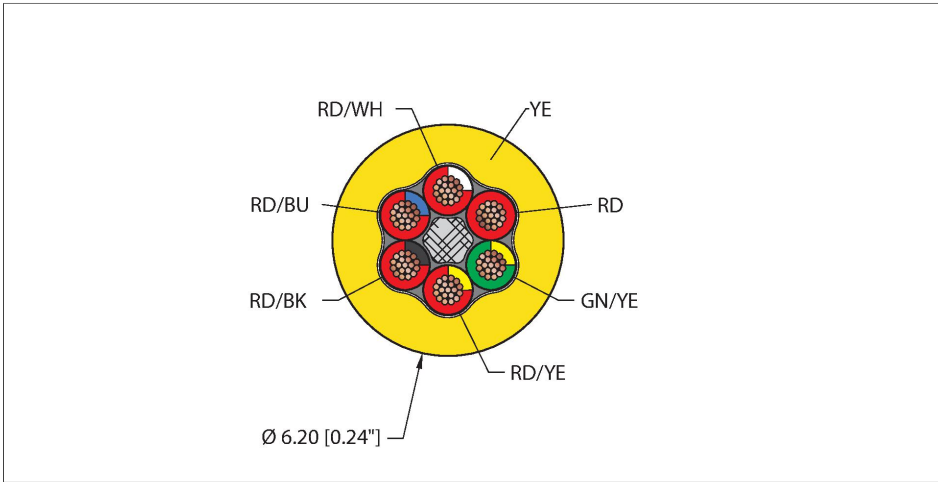

- Instrumentation Tray Cable
- Yellow PVC jacket, 6X22 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- Flexlife® and C-Track Approved
- ITC 150V
- PLTC 300V
- UL/CSA AWM 300V
- CMX OUTDOOR 300V
- CMG 300V

Technische Daten

Type	YEL,PVC,6X22,ITC,MSHA
ID	RF51003
Cable data	
Cable Platform	Instrumentation Tray Cable
Total number of conductors	6
Cable diameter	Ø 6.2 mm
Cable jacket	PVC, Yellow
Conductor diameter	0.054 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	6 x 22 AWG [Similar to 0.34 mm²]
Number of strands x O.D.	19 x 0.0058 "
Conductor colors	RD/WH, RD, GN/YE, RD/YE, RD/BK, RD/BU
Weight	0.122 lbs. /meter
Electrical properties at +20 °C	
Voltage	ITC 150V PLTC 300V UL/CSA AWM 300V CMX OUTDOOR 300V CMG 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	17.5 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø

YEL,PVC,6X22,ITC,MSHA| 22-02-2025 01-53 | Technische Änderungen vorbehalten

Technische Daten

Bending radius (dynamic)	≥ 10 x Ø
UL cold bend rating	-40 °C
Flex rating 20 x Ø	10 million cycles
	*When properly installed @ 20°C, 50%RH, and a cycle speed of ≤0.5 cycles per second.
C-Track	Yes
Ambient temperature range (static)	-40...+105 °C
Ambient temperature range (dynamic)	-40...+105 °C
Temperature range (installation)	-20...+105 °C
Approval	
UL Approvals	UL 2250 ITC UL 13 PLTC Sunlight Resistant -40C Cold Bend Oil Res I Oil Res II UL 758 AWM 2517
CSA Approvals	CSA AWM I/II A/B CMX OUTDOOR-CMG CSA FT4
Additional Approvals	MSHA
Compliances	RoHS CE
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.