


REM-102B6E-9F32B-H1151

Absolute Rotary Encoder - Multiturn

Industrial Line

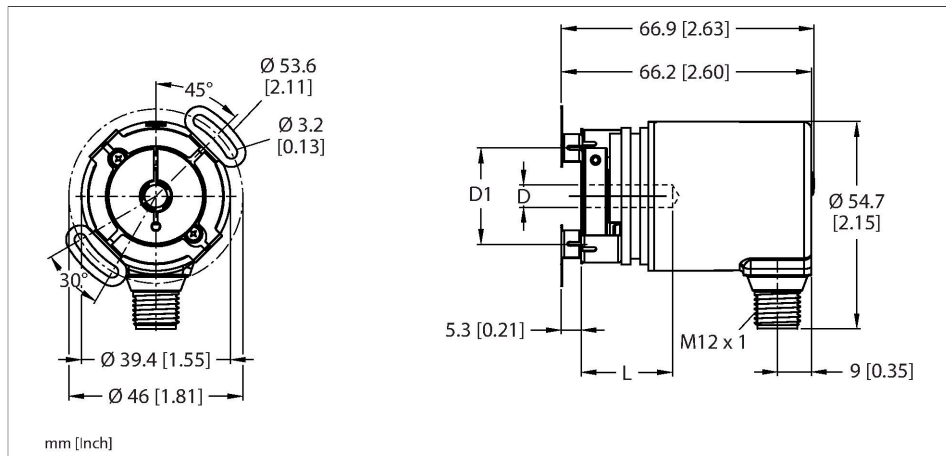



Features

- Flange with slotted flex mount, Ø 46 mm
- Hollow shaft, Ø 6mm
- Optical measuring principle
- Shaft material, stainless steel
- Protection class IP67 on housing and shaft side
- -40...+80 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- 10-30 VDC
- SAE J1939
- M12 connection, 5-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable up to 29 bit over total resolution, default 18 bit
- Total resolution 32 bit scalable, default: 32 bit

Technical data

Type	REM-102B6E-9F32B-H1151
ID	100023547
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Starting torque	< 0.01 Nm
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
Electrical data	
Operating voltage U_b	10...30 VDC
No-load current	≤ 80 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	SAE J1939
Interface	SAE J1939
Mechanical data	
Flange type	Flange with stator coupling
Flange diameter	Ø 46 mm
Shaft Type	Blind hole shaft
Shaft diameter D (mm)	6
Shaft Length L [mm]	18.5
Outer diameter of compression fitting D1	24 mm

Wiring diagram



Technical data

Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N
Environmental conditions	
Ambient temperature	-40...+80 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	30 g (300 m/s ²), 10...2000 Hz
Protection class	IP67
Protection class shaft	IP67

Wiring accessories

Dimension drawing	Type	ID	
	RKC5701-5M	6931034	



Bus cable for CAN (DeviceNet, -CANopen), M12 female connector, straight, cable length: 5 m, jacket material: PUR, anthracite; cULus approval